



FortiAP™-221C and 320C

802.11ac Wireless Access Points



The Need for a Fortified Wireless LAN

Enterprises are looking to increase productivity through uninterrupted access to applications and resources, without compromising security and agility. You want to increase visibility and control of your wireless network traffic by enforcing the same policies as your wired network and eliminate potential blind spots. You also need a solution that meets compliance by proactively blocking unauthorized access, all while providing tools for business continuity by following industry best practices.

Integrated Wireless Security and Access Solution

Fortinet's FortiAP wireless thin access points deliver secure, identity-driven WiFi client access that creates a fortified WLAN network. Centrally managed by a FortiGate® or FortiWiFi™ platform with its integrated Wireless Controller, FortiAPs allow you to deploy a comprehensive, integrated security solution for your wireless and wired networks. By acting as a Wireless Controller, FortiGate or FortiWiFi security platforms enable you to deploy comprehensive Unified Threat Management (UTM) protection over your wireless network.

Highest Performance and Most Versatile Thin Access Point

The FortiAP-221 and FortiAP-320C are IEEE 802.11a/b/g/n/ac standards-based, and operate on both 2.4 GHz b/g/n and 5 GHz a/n spectrums. Supporting the latest 802.11ac technology, including 80 MHz channels width, both access points achieve a 280% throughput improvement over their 802.11n equivalents.

The FortiAP-221C is a next generation smoke detector form factor access point, perfect for discrete installations, such as hotel or school hallways. Supporting 2x2 MIMO technology with two spatial streams, this access point provides association rates of up to 867 Mbps.

The FortiAP-320C has been designed with dual redundant PoE Ethernet ports which provide maximum resiliency and wireless network uptime, making this AP ideal for mission critical environments such as hospitals and factories. This access point is sealed and can withstand an extended temperature range, making it suitable for non temperature controlled warehouse type environments. The plenum-rated enclosure also allows deployment above ceiling tiles in office environments. Leveraging powerful 3x3 MIMO technology and three spatial streams, this access point provides association rates of up to 1,300 Mbps.

High Performance Secure Thin Access Points

- Supports latest 802.11ac technology with association rate of up to 1.3 Gbps
- Leverage existing FortiGate or FortiWiFi platforms as controllers for low TCO
- Full range of authentications and access options for all use cases
- Integration with FortiManager and FortiAnalyzer for centralized management and reporting
- Fast roaming for uninterrupted data access
- Automatic Radio Resource Provisioning (ARRP) for optimized throughput
- Flexible deployment options with simple per device pricing
- Layer 7 application QoS for maximum business productivity
- Rogue AP detection and mitigation to satisfy PCI DSS compliance



FortiCare

Worldwide 24x7 Support
support.fortinet.com



FortiWiFi / FortiAP

Secure business-grade wireless
Wireless.fortinet.com




FortiGuard

Threat Research & Response
www.fortiguard.com

www.fortinet.com

Differentiating Features & Benefits

Enterprise Unified Threat Management	Protects your network with the widest range of security and networking technologies seamlessly integrated into a single device: Firewall, IPS, Application Control, VPN, Web Filtering, and many others.
Application-Layer Quality of Service	Going above and beyond Wireless Multimedia Extensions (WME) by offering Layer 7 traffic shaping and application use control.
Robust Rogue AP Control	Industry's most comprehensive monitoring, detection and suppression of rogue APs for PCI DSS compliance.
"Single Pane of Glass" Management Console	Unmatched visibility and control of all wired and wireless network traffic that eliminates blindspots in your security infrastructure and ensures consistent and effective policy enforcement and compliance.
One Access Point, Many Uses	Software reconfiguration allows one radio to be dedicated to wireless air monitoring while the other provides full AP functionality to client; software license allows simultaneous mesh backhaul and remote AP functionality.
TX Beam Forming (TxBF) and Maximal Ratio Combining (MRC)	Leads to wider coverage and optimum performance due to extended range over a longer range.

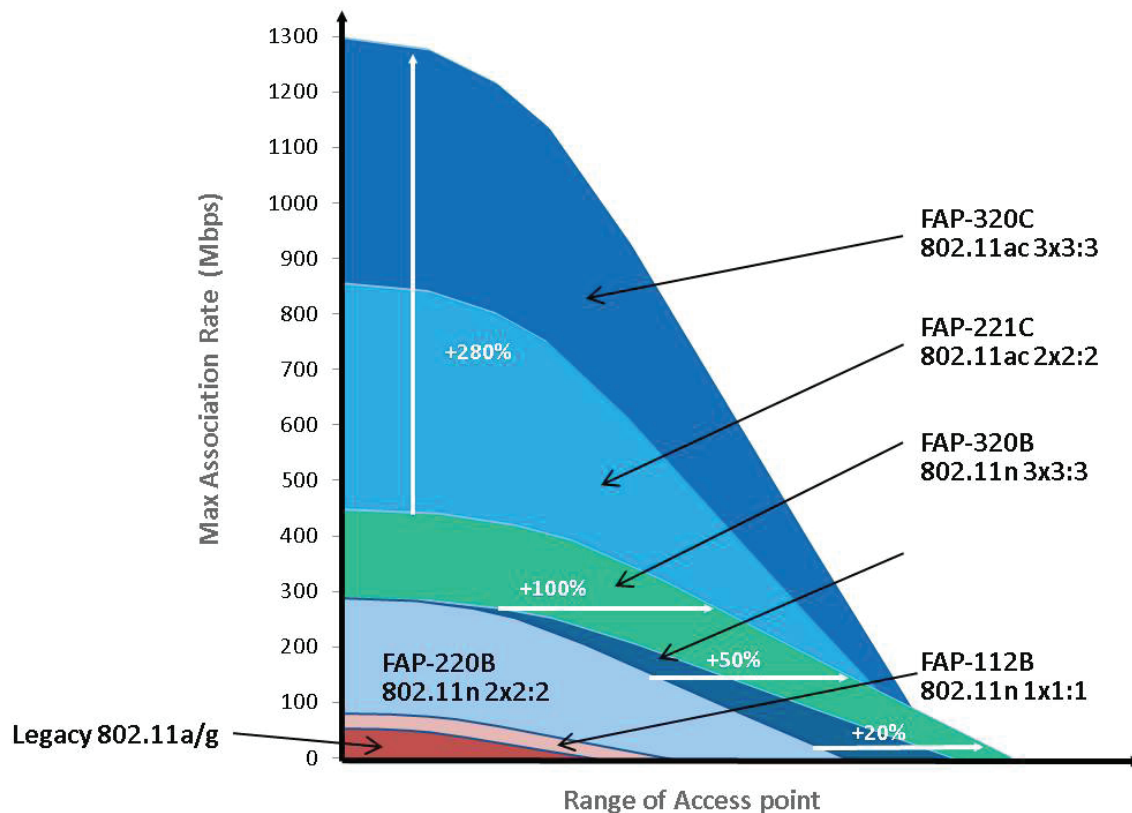


RADIATION PATTERNS OF FREQUENCY 2.4 AND 5 GHz


FAP-221C



H-Plane Pattern

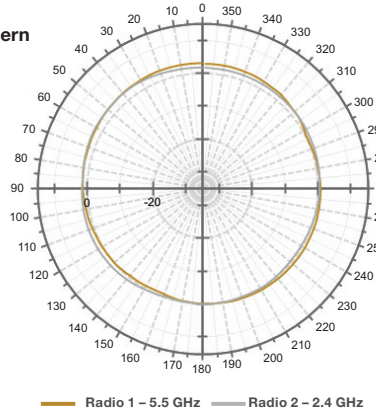

E-Plane Pattern

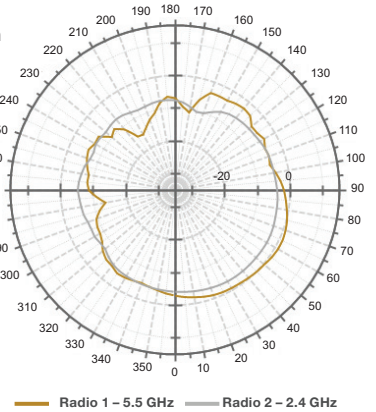


RF RX/TX PERFORMANCE TABLE


				Radio 2	
802.11 a/g	2.4 GHz (FAP-221C Only) Rx Sensitivity	5 GHz Tx Power (dBm)	Rx Sensitivity	2.4 GHz Tx Power (dBm)	Rx Sensitivity
6 Mbps	-96	20	-94	20	-88
9 Mbps	-93	19	-92	20	-88
12 Mbps	-90	19	-90	20	-86
18 Mbps	-87	19	-83	20	-84
24 Mbps	-85	19	-80	20	-80
36 Mbps	-82	18	-77	19	-77
48 Mbps	-78	18	-76	19	-74
54 Mbps	-77	17	-73	18	-72
802.11n HT20					
MCS0	-91	20	-92	20	-92
MCS1	-91	19	-90	20	-90
MCS2	-88	19	-87	20	-87
MCS3	-85	19	-85	20	-85
MCS4	-83	19	-82	20	-82
MCS5	-80	18	-79	19	-78
MCS6	-78	18	-76	19	-77
MCS7	-76	17	-74	18	-74
802.11n HT40					
MCS0 /8	-91	20	-91	20	-92
MCS1 /9	-90	19	-88	20	-89
MCS2 /10	-87	19	-85	20	-86
MCS3 /11	-82	19	-82	20	-83
MCS4 /12	-70	19	-79	20	-80
MCS5 /13	-76	18	-76	19	-77
MCS6 /14	-74	18	-74	19	-74
MCS7 /15	-71	17	-72	18	-71

RADIATION PATTERNS OF FREQUENCY 2.4 AND 5 GHz


FAP-320C

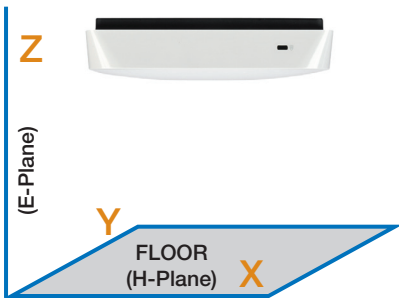

H-Plane Pattern

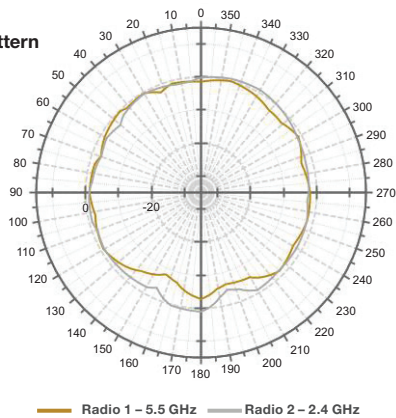

E-Plane Pattern

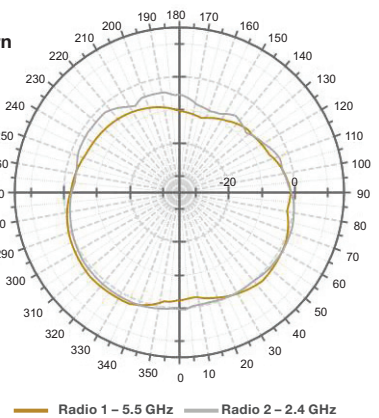

RF RX/TX PERFORMANCE TABLE

	Radio 1		Radio 2	
	5 GHz		2.4 GHz	
802.11 b	Tx Power (dBm)	Rx Sensitivity	Tx Power (dBm)	Rx Sensitivity
1 Mbps	24	-93		
11 Mbps	23	-90		
802.11a/g				
6 Mbps	23	-92	20	-90
9 Mbps	23	-90	20	-88
12 Mbps	23	-88	20	-87
18 Mbps	23	-86	20	-85
24 Mbps	23	-84	20	-84
36 Mbps	22	-80	17	-79
48 Mbps	21	-78	15	-78
54 Mbps	20	-76	13	-77
802.11n HT20				
MCS 0/8/16	22	-90	21	-88
MCS 1/9/17		-87	20	-86
MCS 2/10/18	21	-84	20	-84
MCS 3/11/19	21	-81	20	-82
MCS 4/12/20	20	-79	19	-80
MCS 5/13/21	20	-77	19	-78
MCS 6/14/22	19	-75	18	-77
MCS 7/15/23	19	-73	18	-76
802.11n HT40				
MCS 0/8/16	21	-88	17	-86
MCS 1/9/17	20	-85	16	-84
MCS 2/10/18	20	-82	16	-82
MCS 3/11/19	20	-79	16	-80
MCS 4/12/20	19	-77	14	-78
MCS 5/13/21	19	-75	14	-76
MCS 6/14/22	18	-72	13	-74
MCS 7/15/23	18	-70	13	-72

SPECIFICATIONS


TECHNICAL	FortiAP-221C	FortiAP-320C
Hardware		
Indoor/Outdoor Deployment	Indoor	Indoor and Plenum
Number of Radios	2	2
Number of Antennas	4 Internal	6 Internal
Peak Antenna Gain	3 dBi for 2.4 GHz, 4 dBi for 5 GHz	3 dBi for 2.4 GHz, 4 dBi for 5 GHz
Frequency Bands (GHz) *	2.400–2.4835, 5.150–5.250, 5.250–5.350, 5.470–5.725, 5.725–5.850	2.400–2.4835, 5.150–5.250, 5.250–5.350, 5.470–5.725, 5.725–5.850
Frequency of Radio 1	2.4 GHz b/g/n or 5 GHz a/n/ac	2.4 GHz b/g/n
Frequency of Radio 2	5 GHz IEEE b/g/n	5 GHz IEEE a/n/ac
Tx/Rx Streams	2x2 MIMO dual spatial stream – 867 Mbps/Radio	3x3 MIMO with 3 spatial streams, 1300 Mbps max association rate.
Ethernet Port	1 x 10/100/1000	2 x 10/100/1000
Serial Console Port	—	Yes
Power over Ethernet (PoE)	IEEE 802.3af (15.4W)	Dual redundant PoE power ports with support for IEEE 802.3af or 802.3at
WME Multimedia Extensions	Yes (4 priority queues for voice, video, data and background traffic)	Yes (4 priority queues for voice, video, data and background traffic)
Simultaneous SSIDs	16 (14 for client access, 2 for monitoring)	16 (14 for client access, 2 for monitoring)
EAP Type(s)	EAP-TLS, EAP-TTLS/MSCHAPv2, EAPv0/EAP-MSCHAPv2, PEAPv1/EAP-GTC EAP-SIM, EAP-AKA, EAP-FAST	EAP-TLS, EAP-TTLS/MSCHAPv2, EAPv0/EAP-MSCHAPv2, PEAPv1/EAP-GTC EAP-SIM, EAP-AKA, EAP-FAST
User/Device Authentication	WPA™ and WPA2™ with 802.1x or Preshared key, WEP and Web Captive Portal, MAC blacklist & whitelist	WPA™ and WPA2™ with 802.1x or Preshared key, WEP and Web Captive Portal, MAC blacklist & whitelist
Maximum Tx Power	17 dBm (50 mW)	24 dBm (250 mW) *
Physical Security	Kensington Lock	Kensington Lock
Mean Time Between Failures	> 10 years	> 5 years
IEEE Specifications	802.11a, 802.11b, 802.11e, 802.11g, 802.11h, 802.11i, 802.11j, 802.11n, 802.1X, 802.3af, 802.11ac	802.11a, 802.11b, 802.11e, 802.11g, 802.11h, 802.11i, 802.11j, 802.11n, 802.1X, 802.3af, 802.11ac
802.11ac 80 MHz channel	Supported	Supported
802.11n Features	20 MHz and 40 MHz High-Throughput (HT) Support Increased maximum frame transmission by incorporating A-MPDU and A-MSDU Packet Aggregation Conserve power via Dynamic MIMO power save	20 MHz and 40 MHz High-Throughput (HT) Support Increased maximum frame transmission by incorporating A-MPDU and A-MSDU Packet Aggregation Conserve power via Dynamic MIMO power save
Advanced 802.11n to enhance rate-over-range including:	Low-density parity check (LDPC) encoding Maximum Likelihood Demodulation (MLD) Transmit beamforming (TxBF) Maximum Ratio Combining (MRC) for improved receiver performance	Low-density parity check (LDPC) encoding Maximum Likelihood Demodulation (MLD) Transmit beamforming (TxBF) Maximum Ratio Combining (MRC) for improved receiver performance
Mounting Options	Drywall mount anchors, T-Rail mount and Ceiling mount are included in package	Drywall mount anchors, T-Rail mount and Ceiling mount are included in package
Wireless Monitoring Capabilities		
Frequencies scanned	Not supported	Not supported
Background scan with client access on 2.4 and 5 GHz	Not supported	Not supported
Full-time scan as dedicated Monitor	Not supported	Not supported
Full-time scan with client access on 2.4 GHz	Not supported	Not supported
Dimensions		
Diameter x Height	6.5 x 1.2 in (16.51 x 4 cm)	6.5 x 1.6 in (16.51 x 4 cm)
Weight	10.3 oz (300 g)	19.5 oz (550 g)
Package (shipping) Weight	19.5 oz (550 g)	28.6 oz (810 g)
Environment		
Power Adapter**	Adapter Input: 100–240V, 50/60Hz, 0.4A Output: 12V DC, 1.25A center positive	Adapter Input: 100–240V, 50/60Hz, 0.4A Output: 12V DC, 1.25A center positive
Humidity	10–90% non-condensing	10–90% non-condensing
Operating Temperature	32–104°F (0–40°C)	32–104°F (0–40°C)
Storage Temperature	-4–158°F (-20–70°C)	-4–158°F (-20–70°C)
Directives	Low Voltage Directive • RoHS	Low Voltage Directive • RoHS

* Frequency selection and power may be restricted to abide by regional regulatory compliance laws.

** Sold separately. See price list.

ORDER INFORMATION

Product	SKU	Description
FortiAP-320C	FAP-320C	Indoor wireless AP — 2x GE RJ45 port, dual radio (802.11 a/b/g/n and 802.11 b/g/n, 3x3 MIMO), Ceiling/wall mount kit included, Power adapter not included. For Gigabit PoE injector order: GPI-115. For AC power adapter order: SP-FG20C-PA. Region Code A.
	FC-10-P0320-311-02-DD	8x5 FortiCare Contract
	FC-10-P0320-247-02-DD	24x7 FortiCare Contract
FortiAP-221C	FAP-221C	Indoor wireless AP — 1x GE RJ45 port, dual radio (802.11 a/n/ac and 802.11 b/g/n, 2x2 MIMO), Ceiling/wall mount kit included, Power adapter not included. For Gigabit PoE injector order: GPI-115. For AC power adapter order: SP-FAP221B-PA. Region Code A.
	FC-10-P0225-311-02-DD	8x5 FortiCare Contract
	FC-10-P0225-247-02-DD	24x7 FortiCare Contract

	GLOBAL HEADQUARTERS	EMEA SALES OFFICE	APAC SALES OFFICE	LATIN AMERICA SALES OFFICE
	Fortinet Inc. 1090 Kifer Road Sunnyvale, CA 94086 United States Tel: +1.408.235.7700 Fax: +1.408.235.7737	120 rue Albert Caquot 06560, Sophia Antipolis, France Tel: +33.4.8987.0510 Fax: +33.4.8987.0501	300 Beach Road #20-01 The Concourse Singapore 199555 Tel: +65.6513.3730 Fax: +65.6223.6784	Prol. Paseo de la Reforma 115 Int. 702 Col. Lomas de Santa Fe, C.P. 01219 Del. Alvaro Obregón México D.F. Tel: 011-52-(55) 5524-8480

Copyright© 2013 Fortinet, Inc. All rights reserved. Fortinet®, FortiGate®, and FortiGuard®, are registered trademarks of Fortinet, Inc., and other Fortinet names herein may also be trademarks of Fortinet. All other product or company names may be trademarks of their respective owners. Performance metrics contained herein were attained in internal lab tests under ideal conditions, and performance may vary. Network variables, different network environments and other conditions may affect performance results. Nothing herein represents any binding commitment by Fortinet, and Fortinet disclaims all warranties, whether express or implied, except to the extent Fortinet enters a binding written contract, signed by Fortinet's General Counsel, with a purchaser that expressly warrants that the identified product will perform according to the performance metrics herein. For absolute clarity, any such warranty will be limited to performance in the same ideal conditions as in Fortinet's internal lab tests. Fortinet disclaims in full any guarantees. Fortinet reserves the right to change, modify, transfer, or otherwise revise this publication without notice, and the most current version of the publication shall be applicable. Certain Fortinet products are licensed under U.S. Patent No. 5,623,600.

FST-PROD-DS-AP2HC

FAP-221C-320C-DAT-R1-201401